WOODWARD

Product Specification
03240J

GCP-30 Series

Genset Control Package
Mains & Generator
Protection & Control

APPLICATIONS

The GCP-30 Series genset control is designed to provide total control for multiple, medium to large sized applications.

A network of the compact, versatile GCP-30 controls is capable of controlling up to 14 gensets with automatic sequencing. Load management features include automatic base loading/peak shaving, import/export control and emergency power/back up power generation.

The GCP-31 has logic for one circuit breaker and the GCP-32 has logic for two circuit breakers including open/closed transition.

Fully integrated communication to engine ECUs including [via CAN bus] standard SAE J1939, Deutz EMR, Scania S6, Volvo EMS2, mtu ADEC, mtu MDEC; [via RS232] Caterpillar CCM to EMCP-II, and ECM.

DESCRIPTION

Features

- True RMS 8× voltage (generator/busbar/mains)
- True RMS 4× current (generator/mains)
- Start/stop sequence for Diesel/Gas engines
- Engine pre-glow or purge control
- Battery voltage monitoring
- Speed control with overspeed monitoring
- Idle speed mode operation
- kWh/operation hours/start/maintenance counter
- Load dependent start/stop for up to 14 generators
- Configurable trip/control set points
- Configurable delays for each protection/alarm
- Magnetic/switching Pickup input
- 16 configurable discrete alarm inputs
- 7 configurable/programmable relays
- Two-line LC display
- Synchroscope
- Push-buttons for direct control
- CAN bus communication
- Multi-level password protection
- Language manager (English/German switchable)

DESCRIPTION (continued)

Protection

	ANSI #
• 3/4-line measurements	
Mains	
• Over-/undervoltage	(59/27)
• Over-/underfrequency	(81O/U)
• Phase/vector shift	(78)
Generator	
• Over-/undervoltage	(59/27)
• Over-/underfrequency	(81O/U)
• Overload	(32)
• Reverse/reduced power	(32R/F)
• Unbalanced load	(46)
• Time-overcurrent (TOC)	(50)

Controller (all versions)

- Speed/frequency/real power
- Voltage/power factor cosphi
- Mains import/export power
- Load/var sharing for up to 14 generators

Controller (GCP-31)

Synchronizer for 1 CB
- Isolated operation
- Softloading
- Mains parallel operation

Controller (GCP-32)

Synchronizer for 2 CB
- same as GCP-31 plus following
- Open transition (break-before-make)
- Closed transition (make-before-break)

Special (Version dependent)

- 2 configurable analog outputs (0/4 to 20 mA)
- Generator real power setpoint via 0/4 to 20 mA
- Mains import/export power via 0/4 to 20 mA
- Discrete outputs raise/lower for n/f/V/P/Q
- Analog outputs raise/lower for n/f/V/P/Q
- PWM outputs raise/lower for n/f/P
- 7 conf. analog measuring inputs (0/4 to 20 mA, Pt100, VDO)
- Coupling to LS 4 (GCP-31 only; for details see product specification 37167)
- Event recorder with real time clock

- **J1939, mtu MDEC/ADEC(ECU7), and CAT CCM coupling**
- **AMF auto start/stop**
- **Complete engine, generator, and mains protection and controller in one unit**
- **True RMS sensing of generator, busbar and mains voltage as well as generator and mains current**
- **Synchronization for one/two breakers**
- **Load management-automatic base load/peak shaving, import/export power control, automatic sequencing**
- **Load/var sharing for up to 14 generators incl. auto start/stop**
- **Counters for kWh, engine starts, operating hours, maintenance call**
- **Freely configurable discrete and analog alarm inputs**
- **Freely configurable relay and analog outputs**
- **Configurable via PC or front panel**
- **CAN bus based communication**
- **CE marked**
- **UL/cUL Listed**

SPECIFICATIONS (for more information see manual 37364)

Accuracy ..... Class 1
Power supply ..... 12/24 Vdc (9.5 to 32 Vdc)
Intrinsic consumption ..... max. 20 W
Ambient temperature Operation ..... -20 to 70 °C
Storage ..... -30 to 80 °C
Ambient humidity ..... 95 %, non-condensing
Voltage ..... Rated ⅄/Δ: [1] 66/115 Vac or [4] 230/400 Vac
V_{ph-ph} max. (UL): [1] 150 Vac or [4] 300 Vac
Rated $V_{ph-ground}$: [1] 150 Vac or [4] 300 Vac
Rated surge voltage: [1] 2.5 kV or [4] 4.0 kV
Setting range (prim.): 0.050 to 65.000 kVac
Measuring frequency ..... 50/60 Hz (40 to 70 Hz)
Linear measuring range up to ..... $1.3 \times V_{rated}$
Input resistance ..... [1] 0.21 MΩ, [4] 0.7 MΩ
Max. power consumption per path ..... < 0.15 W
Current (rated values; I_{rated}) ..../5 A
Linear measuring range up to ..... $I_{gen} = 3.0 \times I_{rated}$
$I_{mains} = 1.5 \times I_{rated}$
Load ..... < 0.15 VA
Rated short-time current (1 s) ..... $10 \times I_{rated}$
Discrete inputs ..... isolated
Input range ..... 12/24 Vdc (6 to 32 Vdc)
Input resistance ..... approx. 6.8 kΩ
Analog inputs ..... freely scaleable
Type ..... 0/4 to 20 mA, Pt100, VDO
Resolution ..... 10 Bit

Relay outputs ..... potential free
Contact material ..... AgCdO
Load (GP) ..... 2.00 Aac@250 Vac
2.00 Adc@24 Vdc / 0.36 Adc@125 Vdc / 0.18 Adc@250 Vdc
Pilot duty (PD) .....
1.00 Adc@24 Vdc / 0.22 Adc@125 Vdc / 0.10 Adc@250 Vdc
Analog outputs ..... isolated
Type ..... 0/4 to 20 mA, freely scaleable
Resolution ..... 8/12 Bit (depending on model)
Max. load 0/4 to 20 mA ..... 500 Ω
Insulating voltage ..... 1,500 Vdc
Housing ..... Type APRANORM DIN 43 700
Dimensions ..... 144×144×118 mm
Front cutout ..... 138[+1.0]×138[+1.0] mm
Connection ..... screw/plug terminals depending on connector 1.5 mm² or 2.5 mm²
Front ..... insulating surface
Protection system ..... with correct installation
Front IP42
(sealed IP54; gasket kit = P/N 8923-1039)
Back IP21
Weight ..... depending on version, approx. 1,000 g
Disturbance test (CE) ..... tested according to applicable EN guidelines
Listings ..... UL/cUL listed (File No.: E231544)

DIMENSIONS

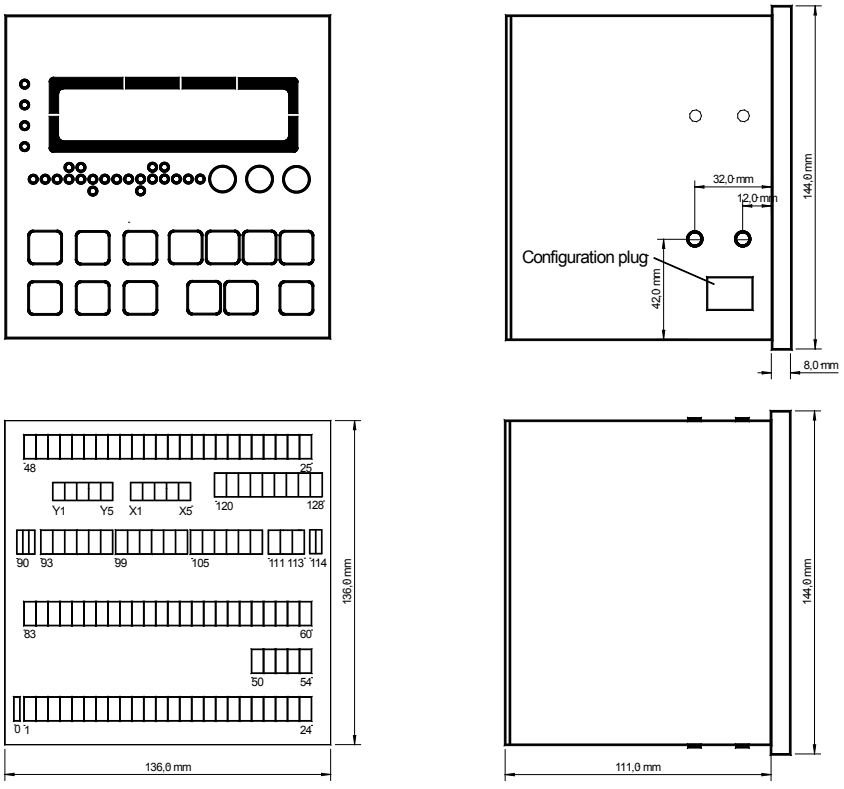

2002-11-21 | GCP30-AMG2 Dimensions g2ww-4702-ab.skf

APPLICATIONS

Typical application for the GCP-32 (GCP-31 same but without MCB)

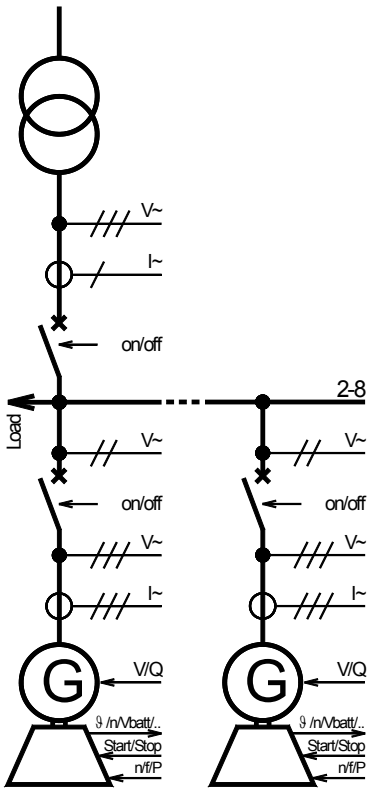

WIRING DIAGRAM (example: GCP-32/XPQ+SC10; for more information see manual 37364)

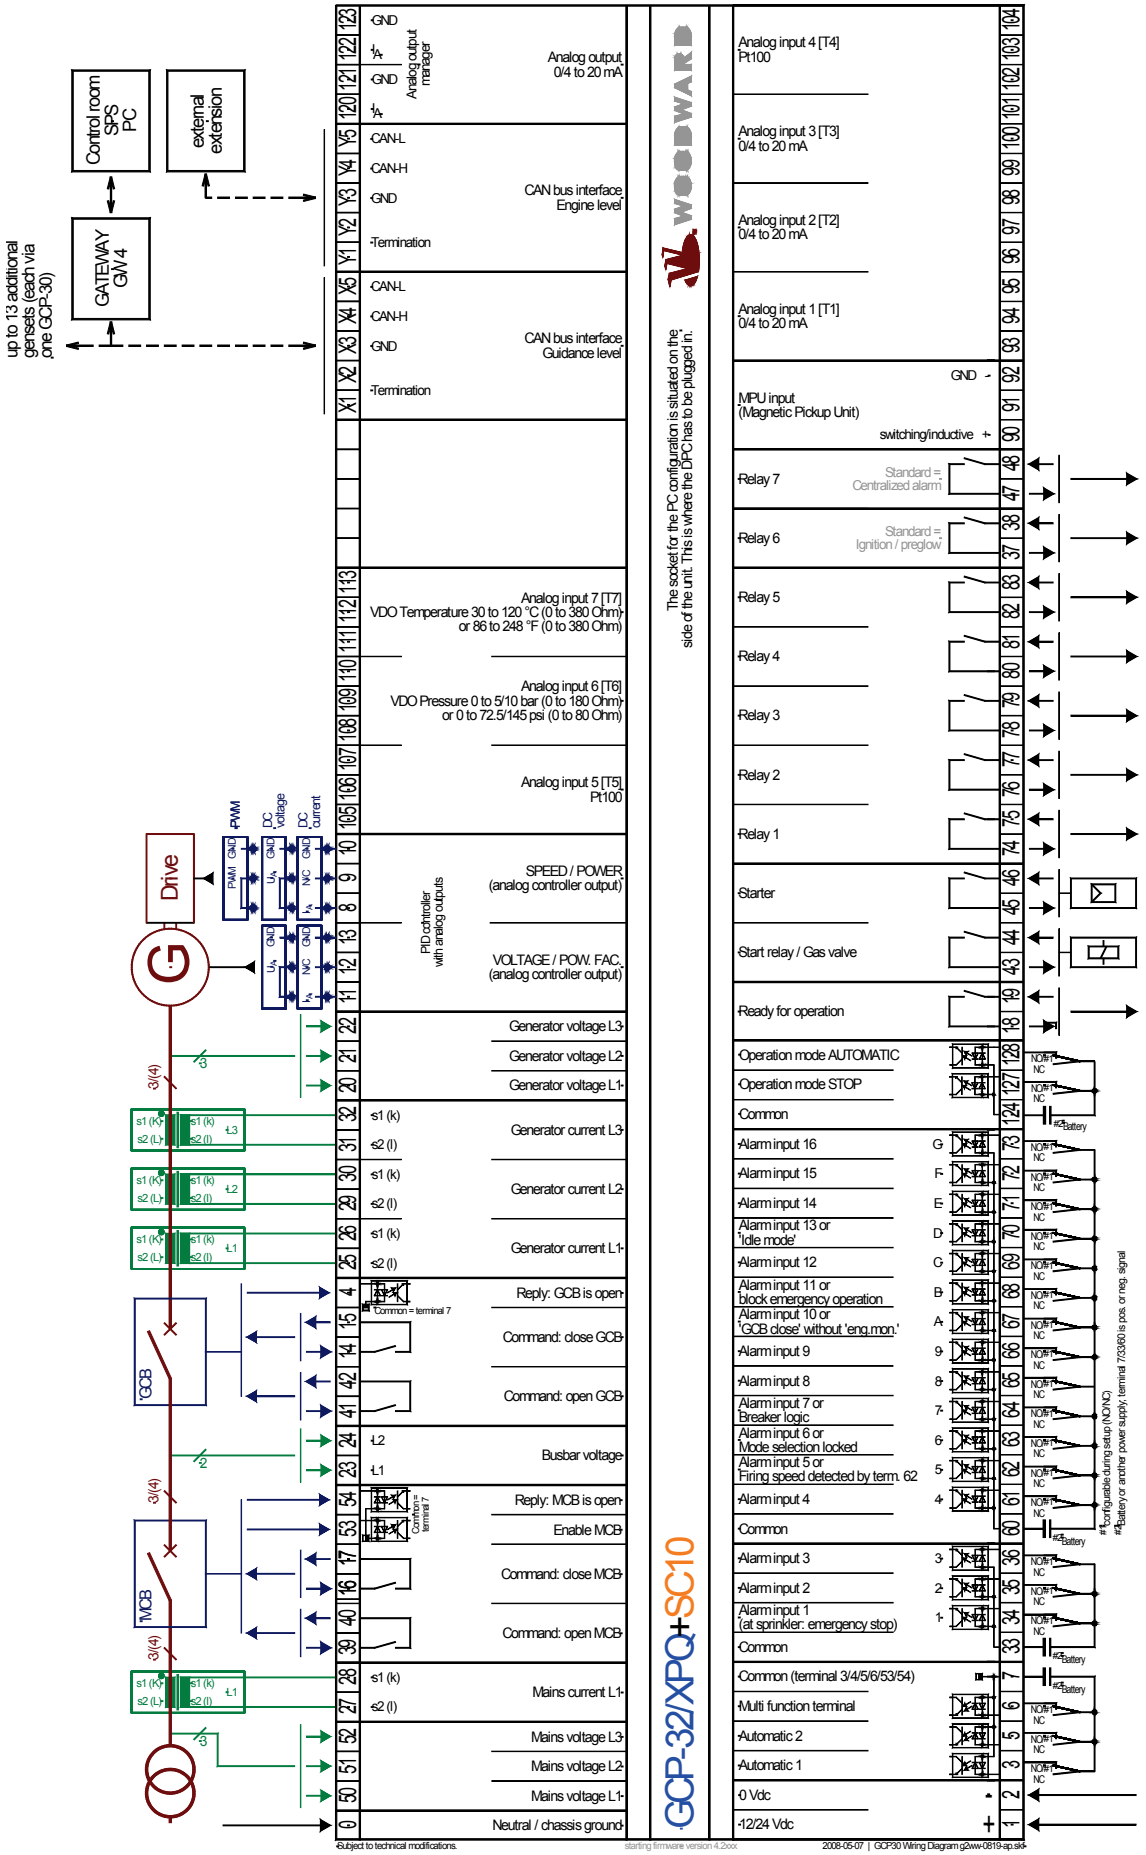

International
Woodward
PO Box 1519
Fort Collins CO, USA
80522-1519
1000 East Drake Road
Fort Collins CO 80525
Ph: +1 (970) 498-3634
Fax: +1 (970) 498-3058
email:
SalesPGD_NAandCA@woodward.com

Europe
Woodward GmbH
Handwerkstrasse 29
70565 Stuttgart, Germany
Ph: +49 (0) 711 789 54-510
Fax: +49 (0) 711 789 54-101
email:
SalesPGD_EMEA@woodward.com

Distributors & Service
Woodward has an international network of distributors and service facilities. For your nearest representative, call the Fort Collins plant or see the Worldwide Directory on our website.

www.woodward.com

For more information contact:

Subject to technical modifications.

This document is distributed for informational purposes only. It is not to be construed as creating or becoming part of any Woodward Governor Company contractual or warranty obligation unless expressly stated in a written sales contract.

We appreciate your comments about the content of our publications. Please send comments including the document number below to stgt-doc@woodward.com

© Woodward
All Rights Reserved

03240J - 2012/9/Stuttgart

FEATURES OVERVIEW

GCP-30 Series Genset Control	GCP-31				GCP31			
Package	BPQ	XPQ	XPQ+SB03	XPQ+SC10	BPQ	XPQ	XPQ+SB03	XPQ+SC10
Control								
Breaker control logic	1	1	1	1	2	2	2	2
Synchronization	✓	✓	✓	✓	✓	✓	✓	✓
Isolated single-unit operation	✓	✓	✓	✓	✓	✓	✓	✓
AMF (auto mains failure operation)		✓ #1	✓ #1	✓ #1	✓	✓	✓	✓
Stand-by operation	✓	✓	✓	✓	✓	✓	✓	✓
Peak load op. (auto start/stop)	✓	✓	✓	✓	✓	✓	✓	✓
Mains parallel operation	✓	✓	✓	✓	✓	✓	✓	✓
Open transition (break-before-make)					✓	✓	✓	✓
Closed transition (make-before-break)					✓	✓	✓	✓
Softloading	✓ #2	✓ #2	✓ #2	✓ #2	✓	✓	✓	✓
Accessories								
Start/stop logic for Diesel/Gas engines	✓	✓	✓	✓	✓	✓	✓	✓
kWh counter	✓	✓	✓	✓	✓	✓	✓	✓
Operating hours/start/maintenance counter	✓	✓	✓	✓	✓	✓	✓	✓
Configuration via PC #3	✓	✓	✓	✓	✓	✓	✓	✓
Event recorder, real time clock		50	50	50		50	50	50
Language manager (English/German)	✓	✓	✓	✓	✓	✓	✓	✓
Protection								
Generator: voltage/frequency	✓	✓	✓	✓	✓	✓	✓	✓
Mains: volt./freq./phase shift	✓	✓	✓	✓	✓	✓	✓	✓
Generator: overload/unbalanced load	✓	✓	✓	✓	✓	✓	✓	✓
Generator: reverse/reduced power	✓	✓	✓	✓	✓	✓	✓	✓
Generator: time-overcurrent (TOC)	✓	✓	✓	✓	✓	✓	✓	✓
Controller								
Discrete raise/lower: n/f & P #4	✓ #5	✓ #5	✓ #5	✓ #5	✓ #5	✓ #5	✓ #5	✓ #5
Discrete raise/lower: V & Q #4	✓ #5	✓ #5	✓ #5	✓ #5	✓ #5	✓ #5	✓ #5	✓ #5
Analog raise/lower: n/f & P #4 #5	✓	✓	✓	✓	✓	✓	✓	✓
Analog raise/lower: V & Q #4 #5	✓	✓	✓	✓	✓	✓	✓	✓
PWM raise/lower: n/f & P #4 #5	✓	✓	✓	✓	✓	✓	✓	✓
Mains import/export power via 20 mA		✓	✓	✓		✓	✓	✓
Mains import/export power control	✓	✓	✓	✓	✓	✓	✓	✓
Load-dependent start/stop	✓	✓	✓	✓	✓	✓	✓	✓
Active power setpoint 0/4 to 20 mA #6		✓	✓	✓		✓	✓	✓
Load/var sharing for **14 generators**	✓	✓	✓	✓	✓	✓	✓	✓
I/O's								
Magnetic/switching Pickup	✓	✓	✓	✓	✓	✓	✓	✓
Discrete alarm inputs (configurable)	16	16	16	16	16	16	16	16
Relay outputs (configurable)	7	7	7	7	7	7	7	7
Analog inputs (configurable) #6		7	7	7		7	7	7
Analog outputs 0/4 to 20 mA (configurable)		2	2	2		2	2	2
External operation mode selection via DI		✓	✓	✓		✓	✓	✓
CAN bus comm., Guidance level #7	✓	✓	✓	✓	✓	✓	✓	✓
CAN bus comm., Engine level #8				✓				✓
RS-232 comm., Engine level #9			✓				✓	
LS 4 - Circuit Breaker Control #10		✓	✓	✓				
Listings/Approvals								
CE Marked	✓	✓	✓	✓	✓	✓	✓	✓
UL/cUL Listed	✓	✓	✓	✓	✓	✓	✓	✓
Part numbers P/N								
Measuring inputs 100 Vac, ../1 A (8440-	-	-1556	-	-1806	-	-1572	-	-
Measuring inputs 100 Vac, ../5 A (8440-	-1609	-1558	-1562	-1560	-	-1574	-1578	-1576
Measuring inputs 400 Vac, ../1 A (8440-	-	-	-	-1716	-1612	-1573	-	-1664
Measuring inputs 400 Vac, ../5 A (8440-	-1610	-1559	-1563	-1561	-1614	-1575	-1579	-1577

#1 External unit LS 4 necessary
#2 In isolated parallel operation with min. 2 gensets in parallel
#3 Cable incl. software necessary (DPC; P/N 5417-557)
#4 n = speed; f = frequency; V = voltage, P = real power; Q = reactive power
#5 +/-20 mA and +/-10 Vdc and PWM signal (type and range configurable); bias/discrete setpoint via relay manager
#6 [T1]-[T3] = 0/4 to 20 mA, [T4]/[T5] = Pt100, [T6] = VDO 0 to 180ohm, [T7] = VDO 0 to 380ohm; function of 20 mA inputs is configurable between alarm input, remote setpoint value for generator real power, mains import/export real power measuring value; others upon request
#7 Remote monitoring, control, configuration (GW 4 could be used for several interfaces; refer to product specs 37170 / manual 37360)
#8 CAN bus connection to IKD1, mtu MDEC, mtu ADEC, Volvo EMS2, Scania EMS/S6, CAN SAE J1939 and/or ST3 (configurable; refer to manual 37382)
#9 RS-232 connection via Caterpillar CCM to Caterpillar EMCP-II, and ECM (configurable; refer to manual 37200)
#10 External unit LS 4 (refer to product specs 37167 / manual 37105)